


ABCO Standard Inductor

AEC-Q200

POWER INDUCTOR

LPMT3012-A1 SERIES

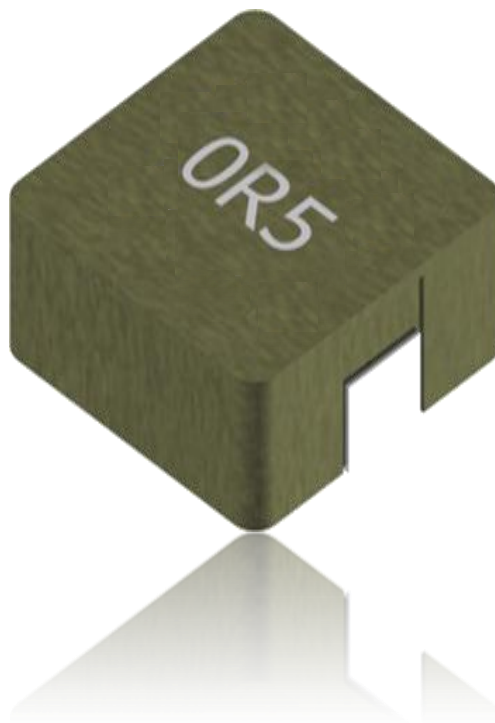


31, Dunchon-daero 388 Beon-gil
Seongnam-si, Gyeonggi-do, KOREA
Sales Dept. TEL:82-31-730-5082
FAX:82-31-730-5152
Eng. Dept. TEL:82-31-730-5053
FAX:82-31-730-5153

ABCO ELECTRONICS CO., LTD.

LPMT3012-A1 SERIES

SHAPE & DIMENSIONS / RECOMMENDED SOLDER LAND PATTERN

Unit:mm

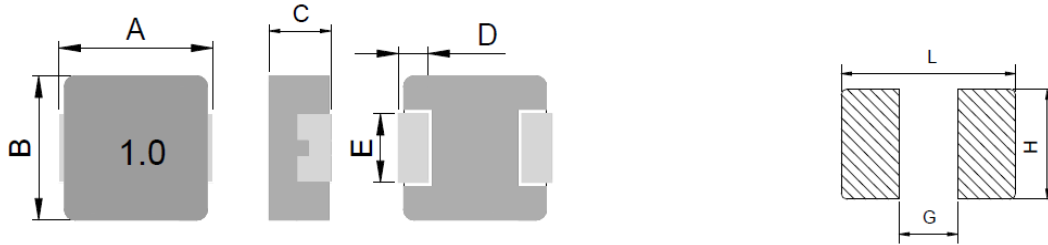

Series	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
LPMT3012-A1	3.5±0.2	3.2±0.2	1.0±0.2	0.7±0.2	1.2±0.2

L(mm)	G(mm)	H(mm)
4.1	1.9	1.45

ELECTRICAL CHARACTERISTICS

Ordering code	Inductance [μH]	Tolerance (%)	Freq. (kHz)	Rdc(mΩ)		Isat(A)	Irms(A)
				Max.	Typ.	Typ.	Typ.
LPMT3012T - R22M-A1	0.22	± 20	100	17.0	14.0	10.0	6.5
LPMT3012T - R33M-A1	0.33	± 20		20.0	16.0	9.2	6.2
LPMT3012T - R36M-A1	0.36	± 20		23.0	18.5	8.5	6.0
LPMT3012T - R47M-A1	0.47	± 20		30.0	25.0	7.2	5.0
LPMT3012T - R56M-A1	0.56	± 20		36.0	31.0	6.6	4.5
LPMT3012T - R68M-A1	0.68	± 20		40.0	34.0	6.1	4.0
LPMT3012T - R82M-A1	0.82	± 20		48.0	41.0	5.8	3.5
LPMT3012T - 1R0M-A1	1.00	± 20		60.0	50.0	5.5	3.3
LPMT3012T - 1R5M-A1	1.50	± 20		85.0	71.0	4.0	3.0
LPMT3012T - 2R2M-A1	2.20	± 20		115	98.0	3.4	2.7
LPMT3012T - 3R3M-A1	3.30	± 20		210	191	3.1	2.0
LPMT3012T - 4R7M-A1	4.70	± 20		293	266	2.8	1.6
LPMT3012T - 5R6M-A1	5.60	± 20		360	310	2.2	1.5
LPMT3012T - 6R8M-A1	6.80	± 20		400	360	2.0	1.4
LPMT3012T - 8R2M-A1	8.20	± 20		463	420	1.7	1.2
LPMT3012T - 100M-A1	10.0	± 20		550	498	1.4	1.0

Test Equipments

- Inductance measured : HP4284A,CH11025,CH3302,CH1320,CH1320S LCR METER(100kHz, 1.0V)
- Rdc : CH16502,Agilent33420A MICRO OHMMETER.
- Saturation Current (Isat) will cause L0 to drop approximately 30%
- Heat Rated Current (Irms) will cause the coil temperature rise approximately Δt of 40°C
- ※ Rated DC current(Idc) : The value of Isat or Irms , whichever is smaller

Operating Temperature Range

-55°C ~ +125°C (Including self-generated heat)