


ABCO Standard Inductor

POWER INDUCTOR

LPMT5020-1HP SERIES

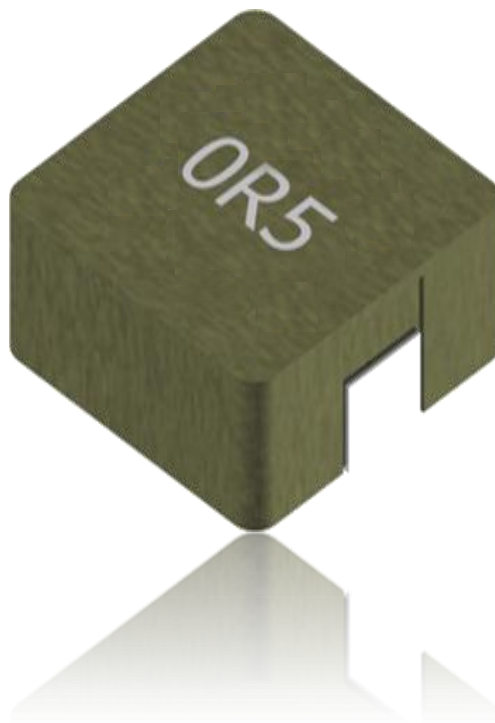

31, Dunchon-daero 388 Beon-gil
Seongnam-si, Gyeonggi-do, KOREA
Sales Dept. TEL:82-31-730-5082
FAX:82-31-730-5152
Eng. Dept. TEL:82-31-730-5053
FAX:82-31-730-5153

ABCO ELECTRONICS CO., LTD.

Inductor for Car of Metal Molding type



<http://www.abco.co.kr>

■ OPERATION TEMP.

LPMT-1HP Series : -40°C~+125°C(Including self-generated heat)


■ FEATURES

- Metal molding Construction
- High Current and Low Resistance

■ APPLICATIONS

DC/DC converters for PDA, Notebook, Desktop, Battery powered devices etc.

■ ORDERING CODE

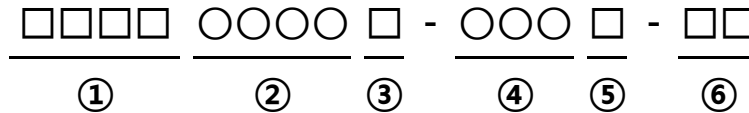

①Type	
LPMT	

②Body size(LxWxH)	
5020	5.7X5.2X1.8

③Packing	
T	TAPING
B	BULK

④Inductance Value	
R10	0.10μH
1R0	1.0μH
100	10μH

⑤Inductance Tol	
M	±20%
N	±30%

⑥Internal Code
1HP

LPMT5020-1HP SERIES




<http://www.abco.co.kr>

LPMT5020-1HP SERIES

■ SHAPE & DIMENSIONS / RECOMMENDED SOLDER LAND PATTERN

Unit:mm

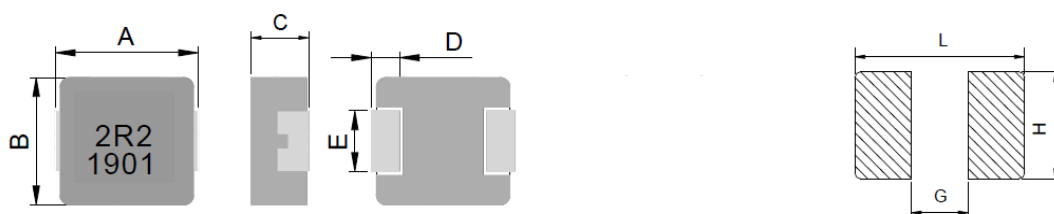

Series	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
LPMT5020-1HP	5.7±0.3	5.2±0.2	1.8±0.2	1.1±0.3	2.5±0.3

L(mm)	G(mm)	H(mm)
6.2	2.2	2.8

■ ELECTRICAL CHARACTERISTICS

Ordering code	Inductance [μH]	Tolerance (%)	Freq. (kHz)	Rdc(mΩ)		Isat(A)	Irms(A)
				Max.	Typ.	Typ.	Typ.
LPMT5020T - R10N-1HP	0.10	± 30	100	4.0	3.6	45.0	18.0
LPMT5020T - R15N-1HP	0.15	± 30		4.6	3.8	27.0	16.0
LPMT5020T - R22M-1HP	0.22	± 20		5.5	4.0	25.0	15.0
LPMT5020T - R33M-1HP	0.33	± 20		7.3	6.3	21.3	12.0
LPMT5020T - R47M-1HP	0.47	± 20		8.6	7.3	18.0	11.5
LPMT5020T - R68M-1HP	0.68	± 20		12.4	11.0	12.8	10.0
LPMT5020T - 1R0M-1HP	1.00	± 20		20.0	17.5	13.7	7.0
LPMT5020T - 1R5M-1HP	1.50	± 20		30.5	26.5	9.8	5.5
LPMT5020T - 2R2M-1HP	2.20	± 20		50.0	42.0	9.0	4.2
LPMT5020T - 3R3M-1HP	3.30	± 20		76.0	66.0	7.3	3.3
LPMT5020T - 4R7M-1HP	4.70	± 20		116	103	5.0	2.8
LPMT5020T - 5R6M-1HP	5.60	± 20		122	112	4.0	2.5
LPMT5020T - 6R8M-1HP	6.80	± 20		150	130	3.8	2.4
LPMT5020T - 8R2M-1HP	8.20	± 20		171	148	3.5	2.3
LPMT5020T - 100M-1HP	10.0	± 20		199	180	3.4	2.3
LPMT5020T - 150M-1HP	15.0	± 20		270	240	2.8	1.9
LPMT5020T - 220M-1HP	22.0	± 20	390	350	1.8	1.5	

▼ Test Equipments

- Inductance measured : HP4284A,CH11025,CH3302,CH1320,CH1320S LCR METER(100kHz, 1.0V)
- Rdc : CH16502,Agilent33420A MICRO OHMMETER.
- Saturation Current (Isat) will cause L0 to drop approximately 30%
- Heat Rated Current (Irms) will cause the coil temperature rise approximately Δt of 40°C
- ※ Rated DC current(I_{dc}) : The value of Isat or Irms , whichever is smaller

▼ Operating Temperature Range

-40°C ~ +125°C (Including self-generated heat)