



FTA Series Thick Film Chip Resistors Array Product Specification


Document No.	IE-SP-147
Released Date	2019/10/17
Page No.	1

1 Scope:

- 1.1 This specification is applicable to lead free and halogen free of RoHS directive for FTA series thick film chip resistors array.
- 1.2 Fully lead-free without RoHS exemptions.
- 1.3 The product is for general electronic purpose.

2 Explanation Of Part Number:

(EX)

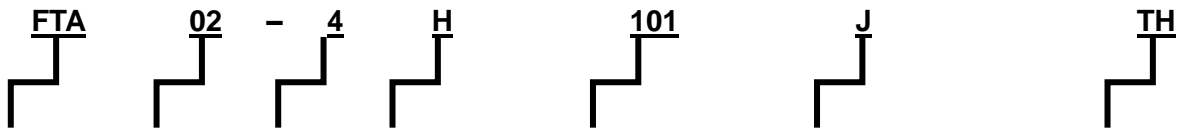

Type	Size	Number of Circuits	Terminal Type	Nominal Resistance	Resistance Tolerance	Packaging(Refer to IE-SP-055)
Fully Lead-Free Thick Film Chip Resistors Array	02(0402) 03(0603)	2:2circuits 4:4circuits 8:8circuits	H:Half Reverse Concave Type D:Convex C:Concave	5% (3-Digit) EX. 10Ω=100 4.7Ω=4R7 Jumper=000	D=± 0.5% F=± 1% J=± 5%	TH : 2 mm Pitch Carrier Tape 10000 pcs H2 : 2 mm Pitch Carrier Tape 20000 pcs H3 : 2 mm Pitch Carrier Tape 30000 pcs H4 : 2 mm Pitch Carrier Tape 40000 pcs 5H : 2 mm Pitch Carrier Tape 50000 pcs TP : 4 mm Pitch Carrier Tape 5000 pcs P2 : 4 mm Pitch Carrier Tape 10000 pcs P3 : 4 mm Pitch Carrier Tape 15000 pcs P4 : 4 mm Pitch Carrier Tape 20000 pcs
				1% (4-Digit) EX. 10.2Ω=10R2 10KΩ=1002 Jumper=0000		

3 General Specifications

型別	額定功率	最高額定電壓	最高過負荷電壓	T.C.R (ppm/°C) 溫度係數	阻值範圍			Number of Terminals 端子數	Number of Resistors 電阻數	JUMPER (0Ω) 額定電流	JUMPER (0Ω) 阻值	
					D(±0.5%) E-24、E-96	F(±1%) E-24、E-96	J(±5%) E-24				F (±1%)	J (±5%)
FTA02-2H (0402)	1/16 W	25V	50V	±650	-----	3Ω ≤ R < 10Ω	3Ω ≤ R < 10Ω	4	2	1A	-----	50mΩ MAX.
				±250	-----	10Ω ≤ R ≤ 1MΩ	10Ω ≤ R < 1MΩ					
FTA02-4H (0402)	1/16 W	25V	50V	±400	-----	1Ω ≤ R < 10Ω	1Ω ≤ R < 10Ω	8	4	1A	-----	50mΩ MAX.
				±200	-----	10Ω ≤ R ≤ 1MΩ	10Ω ≤ R ≤ 1MΩ					
FTA02-2D (0402)	1/16 W	25V	50V	±300	-----	1Ω ≤ R < 10Ω	1Ω ≤ R < 10Ω	4	2	1A	25mΩ MAX.	50mΩ MAX.
				±200	-----	10Ω ≤ R ≤ 10MΩ	10Ω ≤ R ≤ 10MΩ					
FTA02-4D (0402)	1/16 W	25V	50V	±300	-----	1Ω ≤ R < 10Ω	1Ω ≤ R < 10Ω	8	4	1A	25mΩ MAX.	50mΩ MAX.
				±200	-----	10Ω ≤ R ≤ 10MΩ	10Ω ≤ R ≤ 10MΩ					
FTA02-8D (0402)	1/16 W	25V	50V	±250	-----	10Ω ≤ R ≤ 10MΩ	1Ω ≤ R ≤ 10MΩ	16	8	1A	-----	50mΩ MAX.
FTA03-2D (0603)	1/16 W	50V	100V	±200	-----	10Ω ≤ R ≤ 10MΩ	1Ω ≤ R ≤ 10MΩ	4	2	1A	-----	50mΩ MAX.
FTA03-4D (0603)	1/16 W	50V	100V	±200	22Ω ≤ R ≤ 470KΩ	1Ω ≤ R ≤ 10MΩ	1Ω ≤ R ≤ 10MΩ	8	4	1A	25mΩ MAX.	50mΩ MAX.
FTA02-2C (0402)	1/16 W	25V	50V	±650	-----	3Ω ≤ R ≤ 10Ω	3Ω ≤ R < 10Ω	4	2	1A	-----	50mΩ MAX.
				±200	-----	10Ω ≤ R < 1MΩ	10Ω ≤ R ≤ 1MΩ					
FTA02-4C (0402)	1/16 W	25V	50V	±400	-----	1Ω ≤ R < 10Ω	1Ω ≤ R < 10Ω	8	4	1A	-----	50mΩ MAX.
				±200	-----	10Ω ≤ R ≤ 1MΩ	10Ω ≤ R ≤ 1MΩ					
Operating Temperature Range				-55°C ~ +155°C								

IE			QA		Remark IT'S NOT UNDER CONTROL FOR PDF FILE PLS NOTE THE VERSION STATED.. Do not copy without permission	Issue Dep. DATA Center. Series No. 60
Written 王荷花	Checked 	Approved 	Signing 許國敏			




**FTA Series Thick Film Chip Resistors Array
Product Specification**

Document No.	IE-SP-147
Released Date	2019/10/17
Page No.	2

3.1 Power Derating Curve:

Temperature Range: -55°C ~ +155°C

If the ambient temperature exceeds 70 degrees centigrade to 155 degrees centigrade, the power can be modified by the curve as below.

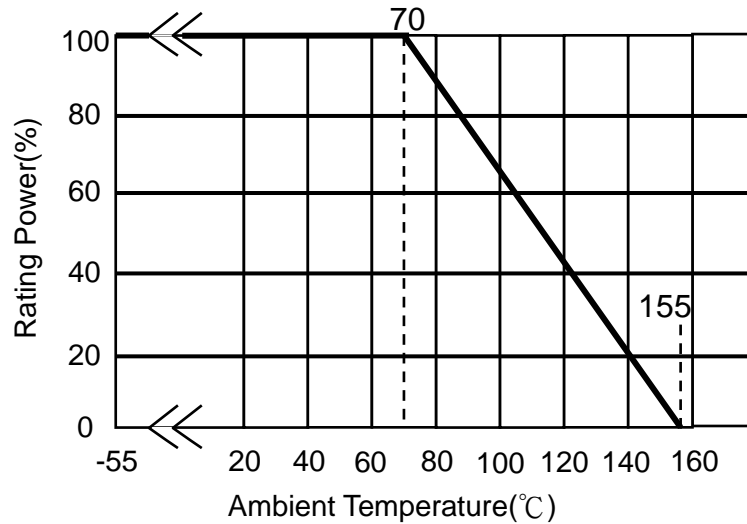

3.2 Voltage Rating:

Rated Voltage: The resistor shall have a DC continuous working voltage or a rms. AC continuous working voltage at commercial-line frequency and wave form corresponding to the power rating, as determined from the following:

$$E = \sqrt{R \times P}$$

E= Rated voltage (V)
P= power rating (W)
R= Nominal resistance(Ω)

Remark

IT'S NOT UNDER CONTROL FOR PDF FILE
PLS NOTE THE VERSION STATED..

Issue Dep. DATA Center.

Do not copy without permission

Series No. **60**



**FTA Series Thick Film Chip Resistors Array
Product Specification**

Document No.

IE-SP-147

Released Date

2019/10/17

Page No.

3

4 Dimensions(mm):

<p style="text-align: center;">FTA02-2H</p> <p style="text-align: center;">Top Side Bottom</p>	<p style="text-align: center;">Circuits</p> <p style="text-align: center;">R1 R2</p> <p style="text-align: center;">R1=R2</p>
<p style="text-align: center;">FTA02-4H</p> <p style="text-align: center;">Top Side Bottom</p>	<p style="text-align: center;">Circuits</p> <p style="text-align: center;">R1 R2 R3 R4</p> <p style="text-align: center;">R1=R2=R3=R4</p>
<p style="text-align: center;">FTA02-2D</p> <p style="text-align: center;">Top Side Bottom</p>	<p style="text-align: center;">Circuits</p> <p style="text-align: center;">R1 R2</p> <p style="text-align: center;">R1=R2</p>

Remark

IT'S NOT UNDER CONTROL FOR PDF FILE
PLS NOTE THE VERSION STATED..

Do not copy without permission

Issue Dep. DATA Center.

Series No. **60**



**FTA Series Thick Film Chip Resistors Array
Product Specification**

Document No.

IE-SP-147


Released Date

2019/10/17


Page No.

4


FTA02-4D / FTA03-4D

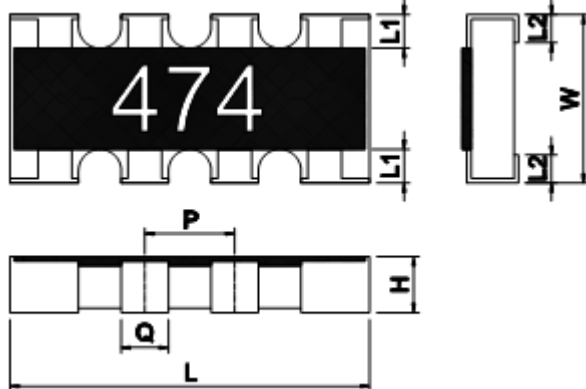


Circuits




FTA02-8D

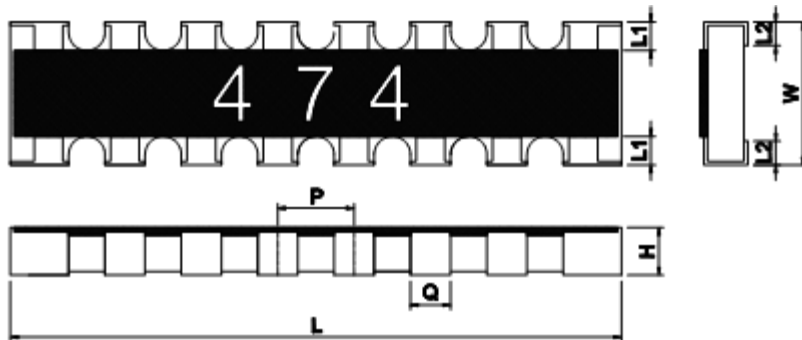


Circuits

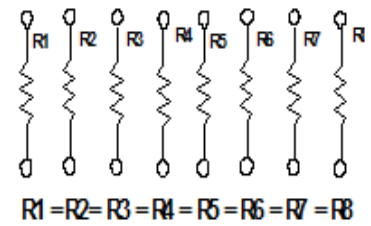

FTA03-2D

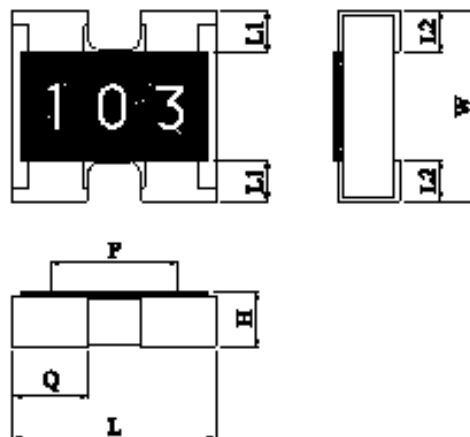

Circuits




Remark

IT'S NOT UNDER CONTROL FOR PDF FILE
PLS NOTE THE VERSION STATED..

Do not copy without permission

Issue Dep. DATA Center.

Series No. **60**

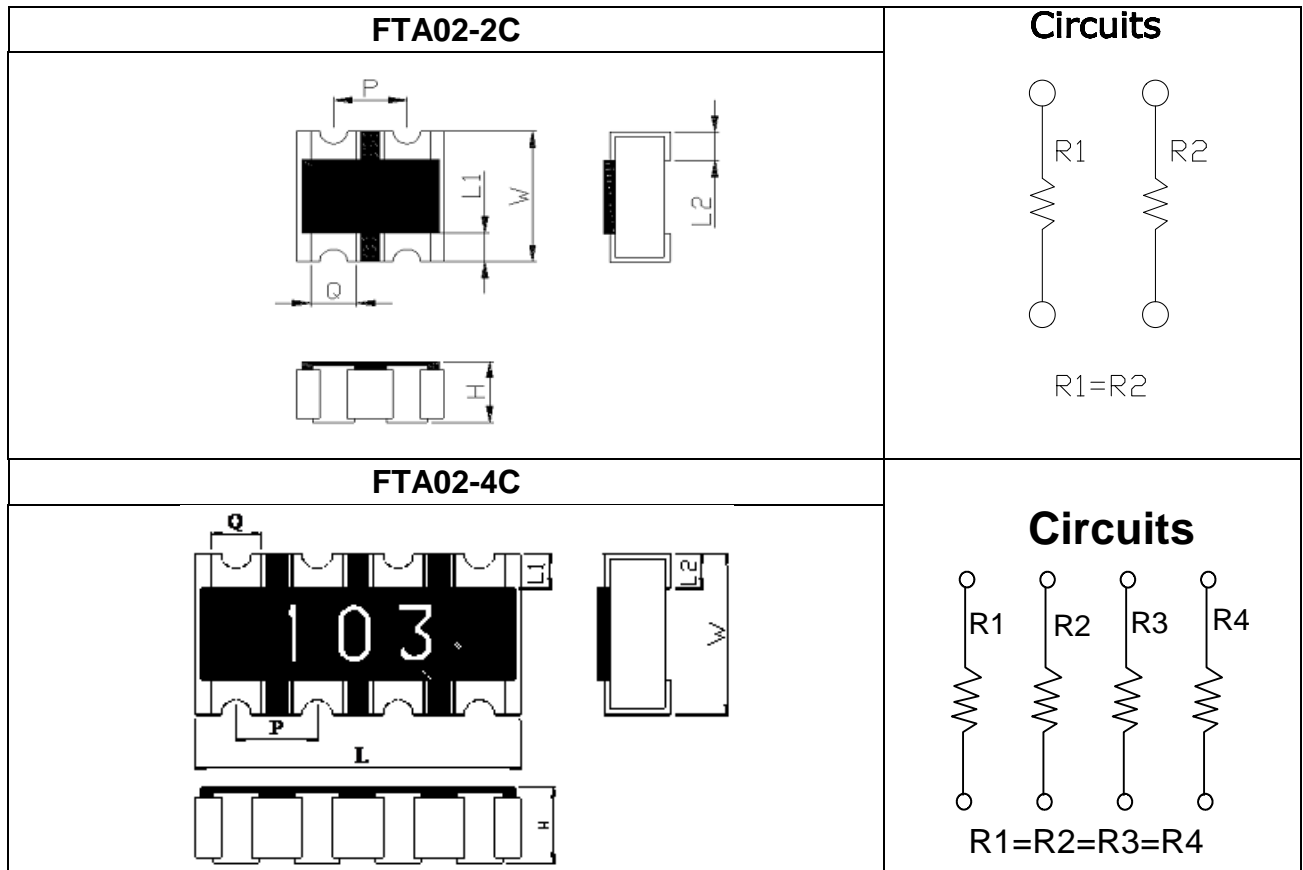

Type Size	L	W	H	L1	L2	D	P	Q	E
FTA02-2H (0402)	1.00±0.10	1.00±0.10	0.30±0.10	----	0.25±0.10	0.6 H (Min.)	(0.50)	0.30±0.10	0.15±0.10
FTA02-4H (0402)	2.00±0.10	1.00±0.10	0.45±0.10	----	0.25±0.10	0.6 H (Min.)	(0.50)	0.30±0.10	0.15±0.10
FTA02-2D (0402)	1.00±0.10	1.00±0.10	0.30±0.05	0.15±0.10	0.25±0.10	----	(0.67)	0.33±0.10	----
FTA02-4D (0402)	2.00±0.10	1.00±0.10	0.40±0.10	0.20±0.10	0.25±0.10	----	(0.50)	0.30±0.10	----
FTA02-8D (0402)	4.00±0.20	1.60±0.10	0.40±0.10	0.30±0.15	0.30±0.10	----	(0.50)	0.25±0.10	----
FTA03-2D (0603)	1.60±0.15	1.60±0.15	0.45±0.10	0.30±0.15	0.30±0.15	----	(0.80)	0.60±0.10	----
FTA03-4D (0603)	3.20±0.20	1.60±0.15	0.50±0.10	0.30±0.15	0.30±0.15	----	(0.80)	0.50±0.10	----
FTA02-2C (0402)	1.00±0.10	1.00±0.10	0.30±0.10	0.18±0.10	0.25±0.10	----	(0.50)	0.30±0.10	----
FTA02-4C (0402)	2.00±0.10	1.00±0.10	0.40±0.10	0.15±0.10	0.25±0.10	----	(0.50)	0.30±0.10	----

Remark


IT'S NOT UNDER CONTROL FOR PDF FILE
PLS NOTE THE VERSION STATED..

Issue Dep. **DATA Center.**

Do not copy without permission


Series No. **60**

5 Structure Graph:
D(Convex) Type

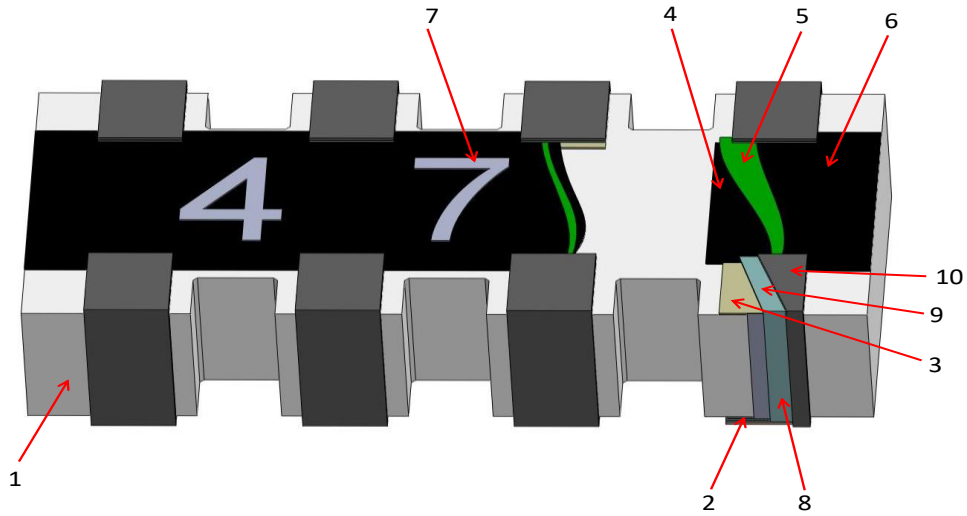

1	Ceramic substrate	6	2nd Protective coating
2	Bottom inner electrode	7	Marking
3	Top inner electrode	8	Terminal inner electrode
4	Resistive layer	9	Ni plating
5	1st Protective coating	10	Sn plating

C(Concave) Type

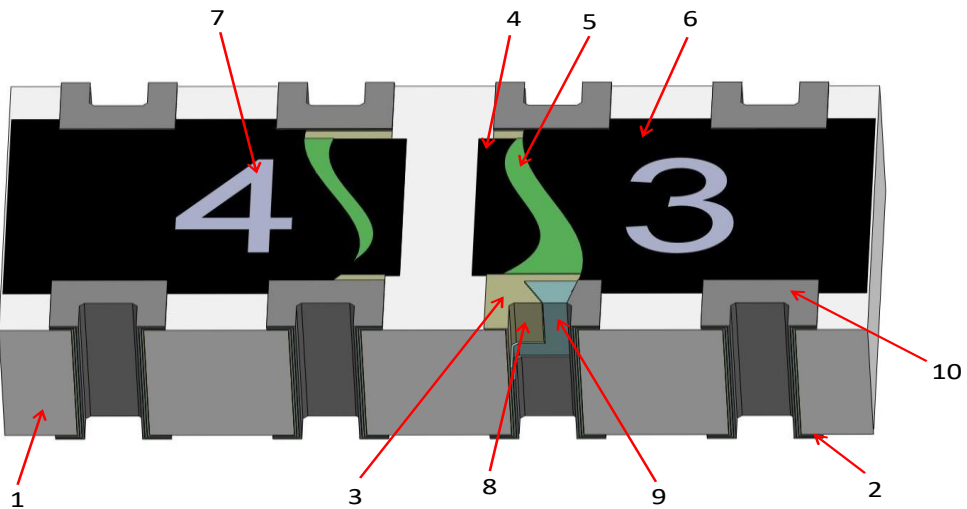

1	Ceramic substrate	6	2nd Protective coating
2	Bottom inner electrode	7	Marking
3	Top inner electrode	8	Terminal inner electrode
4	Resistive layer	9	Ni plating
5	1st Protective coating	10	Sn plating

Remark

IT'S NOT UNDER CONTROL FOR PDF FILE
PLS NOTE THE VERSION STATED..


Issue Dep. DATA Center.

Do not copy without permission

Series No. **60**

6 Reliability Test:

6.1 Electrical Performance Test

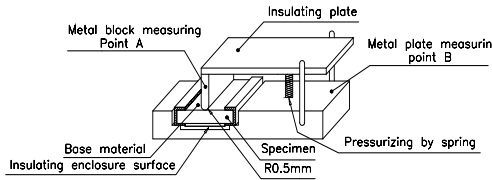ITEM	Conditions	Specifications	
		Resistors	Jumper
Temperature Coefficient of Resistance	$TCR (ppm/^{\circ}C) = \frac{(R2 - R1)}{R1 (T2 - T1)} \times 10^6$ R1: Resistance at room temperature R2: Resistance at -55°C or +125°C T1: Room temperature T2: Temperature -55°C or +125°C Refer to JIS-C5201-1 4.8	Refer item 3. General Specifications	NA
Short Time Overload	Applied 2.5 times rated voltage for 5 seconds and release the load for about 30 minutes , then measure its resistance variance rate. (Rated voltage refer to item 3. general specifications) Refer to JIS-C5201-1 4.13	0.5%、1%:ΔR%=±1.0% 5%:ΔR%=±2.0%	Refer to item3. General Specifications
Insulation Resistance	Put the resistor in the fixture, add 100 VDC in +, - terminal for 60 sec then measured the insulation resistance between electrodes and insulating enclosure or between electrodes and base material. Refer to JIS-C5201-1 4.6 	≥ 10 ⁹ Ω	
Dielectric Withstand Voltage	Put the resistor in the fixture, add 300 VAC in +, -terminal for 60 sec. Refer to JIS-C5201-1 4.7	No short or burned on the appearance.	
Intermittent Overload	Put the tested resistor in chamber under temperature 25±2°C and load 2.5 times rated DC voltage for 1 sec ON ,25 sec OFF , 10000^{+400}_0 test cycles, then it be left at no-load for 1 hour , then measure its resistance variance rate. Refer to JIS-C5201-1 4.13	ΔR%=±5.0%	Refer to item3. General Specifications

Remark

IT'S NOT UNDER CONTROL FOR PDF FILE
PLS NOTE THE VERSION STATED..

Issue Dep.**DATA Center.**

Do not copy without permission

Series No. **60**






FTA Series Thick Film Chip Resistors Array Product Specification

Document No.	IE-SP-147
Released Date	2019/10/17
Page No.	8

6.2 Mechanical Performance Test

ITEM	Conditions	Specifications	
		Resistors	Jumper
Resistance to Solvent	<p>The tested resistor be immersed into isopropyl alcohol of 20~25°C for 5 minutes, then the resistor is left in the room for 48 hrs , then measure its resistance variance rate.</p> <p>Refer to JIS-C5201-1 4.29</p>	$\Delta R = \pm 0.5\%$	Refer to item 3. General Specifications
Solderability	<p>Preconditioning: Put the tested resistor in the apparatus of PCT, at a temperature of 105°C, humidity of 100% RH, and pressure of 1.22×10^5 Pa for a duration of 4 hours. Then after left the tested resistor in room temperature for 2 hours or more.</p> <p>Test method: The resistor be immersed into solder pot in temperature $235 \pm 5^\circ\text{C}$ for 2 sec, then the resistor is left as placed under microscope to observed its solder area.</p> <p>Refer to JIS-C5201-1 4.17</p>	Solder coverage over 95%	
Resistance to Soldering Heat	<p>◎Test method 1 (Solder pot test): The tested resistor be immersed into molten solder of $260 + 5 / - 0^\circ\text{C}$ for $10 + 1 / - 0$ seconds. Then the resistor is left in the room for 1 hour.</p> <p>◎Test method 2 (Solder pot test): The tested resistor be immersed into molten solder of $260 + 5 / - 0^\circ\text{C}$ for $30 + 1 / - 0$ seconds. Then the resistor is left as placed under microscope to observe its solder area.</p> <p>◎Test method 3 (Electric iron test): Preheating temperature : $350 \pm 10^\circ\text{C}$ Electric iron preheating time : $3 + 1 / - 0$ sec Preheating the electric iron on electrode termination, then placed the resistor in the room temperature over 60 min. and measured its resistance variance rate.</p> <p>Refer to JIS-C5201-1 4.18</p>	<p>Test item 1: (1).Variance rate on resistance $\Delta R\% = \pm 1.0\%$ (2).No evidence of electrode damage; No side conductive peeling off.</p> <p>Test item 2: (1).Solder coverage over 95%. (2).The underlying material(such as ceramic) shall not be visible at the crest corner area of the electrode.</p> <p>Test item 3: (1).Variance rate on resistance $\Delta R\% = \pm 1.0\%$ (2).No evidence of electrode damage; No side conductive peeling off.</p>	Refer to item3. General Specifications

Remark	<div style="border: 1px solid black; padding: 5px; display: inline-block;"> IT'S NOT UNDER CONTROL FOR PDF FILE PLS NOTE THE VERSION STATED.. </div>	Issue Dep. DATA Center. Series No. 60
	Do not copy without permission	

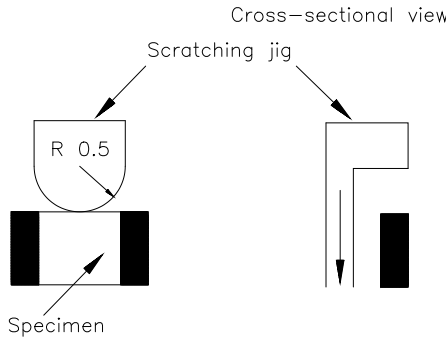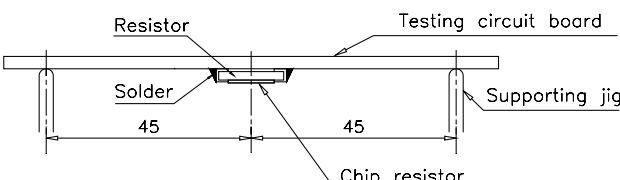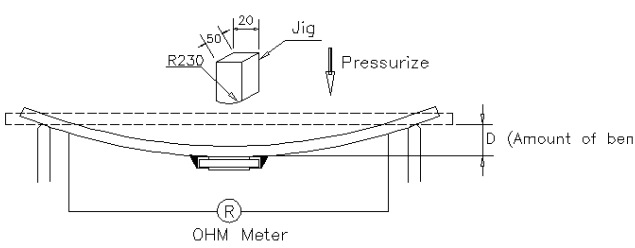ITEM	Conditions	Specifications	
		Resistors	Jumper
Joint Strength of Solder	<p>Preconditioning: Put the tested resistor in the apparatus of PCT, at a temperature of 105°C, humidity of 100% RH, and pressure of 1.22×10⁵Pa for a duration of 4 hours. Then after left the tested resistor in room temperature for 2 hours or more. Test method: ◎Test item 1 (Adhesion): A static load using a R0.5 scratch tool shall be applied on the core of the component and in the direction of the arrow and held for 10 seconds and under load measured its resistance variance rate. Load :FTA02-2H = 10N FTA02-4H = 20N</p>  <p align="center">Cross-sectional view Scratching jig R 0.5 Specimen</p> <p>Refer to JIS-C5201-1 4.32 ◎Test item 2 (Bending Strength): Solder tested resistor on the PC board, add force in the middle down, and under load measure its resistance variance rate . D = 5 mm</p>   <p>Refer to JIS-C5201-1 4.33</p>	<p>Test item 1 : 1. Variance rate on resistance $\Delta R\% = \pm 1.0\%$ 2.No evidence of mechanical damage; No side conductive peeling off.</p> <p>Test item 2 : 1. Variance rate on resistance $\Delta R\% = \pm 1.0\%$ 2.No evidence of mechanical damage; No side conductive peeling off or core body cracked;</p>	<p>Refer to item3. General Specifications</p>

Remark

IT'S NOT UNDER CONTROL FOR PDF FILE
PLS NOTE THE VERSION STATED..

Do not copy without permission

Issue Dep. DATA Center.

Series No. **60**



FTA Series Thick Film Chip Resistors Array Product Specification

Document No.	IE-SP-147
Released Date	2019/10/17
Page No.	10

6.3 Environmental Test

ITEM	Conditions	Specifications									
		Resistors	Jumper								
Resistance to Dry Heat	Put tested resistor in chamber under temperature 155±5 °C for 1000+48/-0 hours. Then leaving the tested resistor in room temperature for 60 minutes, and measure its resistance variance rate. Refer to JIS-C5201-1 4.25	0.5%、1%:ΔR%=±1.0%; 5%:ΔR%=±2.0%;	Refer to item3. General Specifications								
Thermal Shock	Put the tested resistor in the thermal shock chamber under the temperature cycle which shown in the following table shall be repeated 300 times consecutively. Then leaving the tested resistor in the room temperature for 1 hours, and measure its resistance variance rate. <table border="1" style="margin: 5px auto; width: 80%; border-collapse: collapse;"> <tr> <th colspan="2">Testing Condition</th> </tr> <tr> <td style="text-align: center;">Lowest Temperature</td> <td style="text-align: center;">-55±5°C</td> </tr> <tr> <td style="text-align: center;">Highest Temperature</td> <td style="text-align: center;">125±5°C</td> </tr> <tr> <td style="text-align: center;">Temperature-retaining time</td> <td style="text-align: center;">15 minutes each</td> </tr> </table> Refer to MIL-STD 202 Method 107	Testing Condition		Lowest Temperature	-55±5°C	Highest Temperature	125±5°C	Temperature-retaining time	15 minutes each	ΔR%=±1.0%	Refer to item3. General Specifications
Testing Condition											
Lowest Temperature	-55±5°C										
Highest Temperature	125±5°C										
Temperature-retaining time	15 minutes each										
Loading Life in Moisture	Put the tested resistor in the chamber under temperature 40±2°C , relative humidity 90~95% and load the rated voltage for 90 minutes on, 30 minutes off, total 1000 hours. Then leaving the tested resistor in room temperature for 60 minutes, and measure its resistance variance rate. Refer to JIS-C5201-1 4.24	0.5%、1%:ΔR%=±2.0% 5%:ΔR%=±3.0%	Refer to item3. General Specifications								
Load Life	Put the tested resistor in chamber under temperature 70±2°C and load the rated voltage for 90 minutes on, 30 minutes off, total 1000 hours. Then leaving the tested resistor in room temperature for 60 minutes, and measure its resistance variance rate. Refer to JIS-C5201-1 4.25	0.5%、1%:ΔR%=±2.0% 5%:ΔR%=±3.0%	Refer to item3. General Specifications								

7 Plating Thickness:


- 7.1 Ni: ≥ 2μm
- 7.2 Sn(Tin): ≥ 3μm
- 7.3 Sn(Tin): Matte Sn

Remark	<div style="border: 1px solid black; padding: 5px; display: inline-block;"> IT'S NOT UNDER CONTROL FOR PDF FILE PLS NOTE THE VERSION STATED.. </div>	Issue Dep. DATA Center. Series No. 60
	Do not copy without permission	

8 Technical application notes: (This is for recommendation, please customer perform adjustment according to actual application)

8.1 Recommend Soldering Method:

8.1.1 Lead Free IR-Reflow Soldering Profile

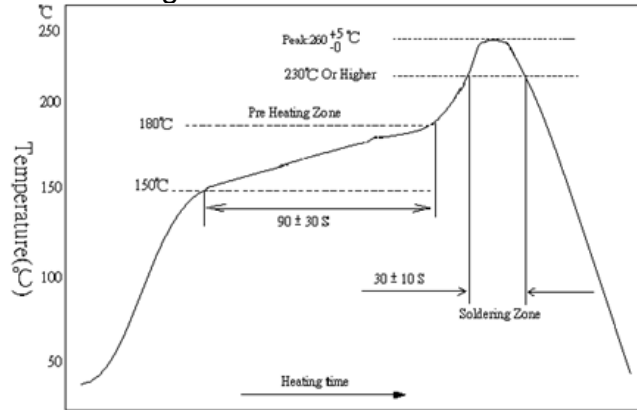


Remark: The peak temperature of soldering heat is 260 +5/-0 °C for 10 seconds.

8.1.2 Soldering Iron: temperature 350°C ± 10°C, dwell time shall be less than 3 sec.


8.2 Recommend Land Pattern Design (For Reflow Soldering):

When a component is soldered, the resistance after soldering changes slightly depending on the size of the soldering area and the amount of soldering. When designing a circuit, it is necessary to consider the effect of a decrease or increase in its resistance.

Unit : mm

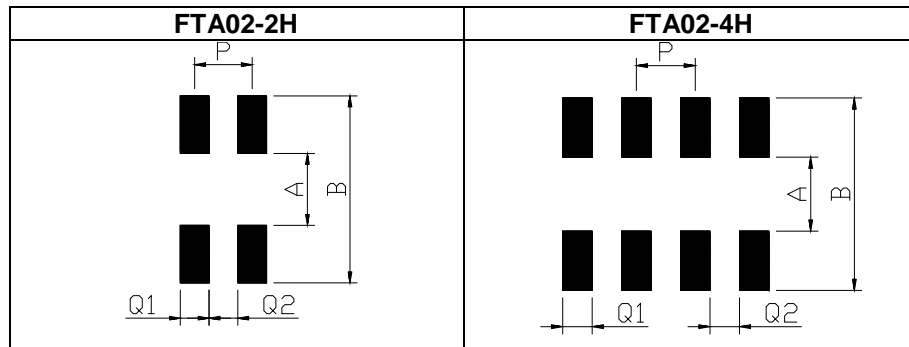

Unit : mm

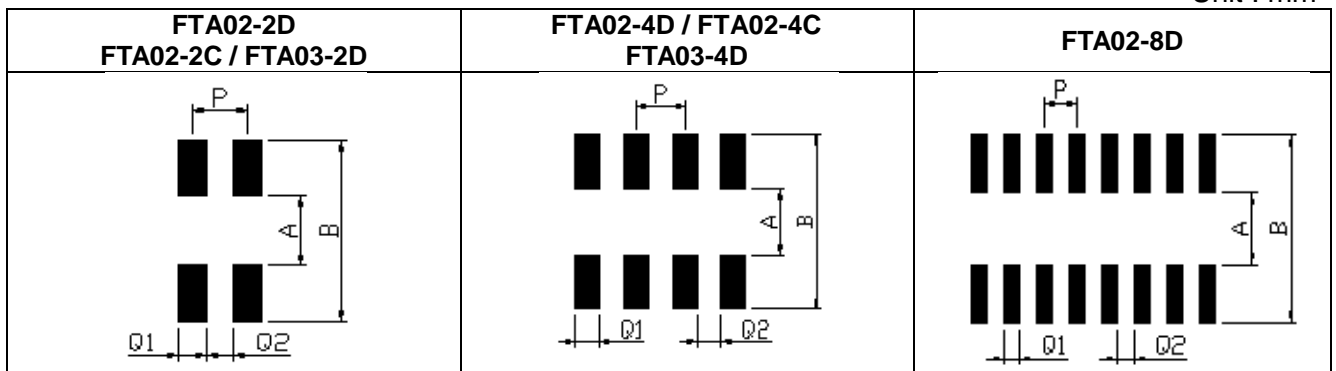

Remark

IT'S NOT UNDER CONTROL FOR PDF FILE
PLS NOTE THE VERSION STATED..

Issue Dep. DATA Center.

Do not copy without permission

Series No. **60**



FTA Series Thick Film Chip Resistors Array Product Specification

Document No.	IE-SP-147
Released Date	2019/10/17
Page No.	12

TYPE \ DIM	A	B	P	Q1	Q2
FTA02-2H	0.50	2.00	0.50	0.28	0.22
FTA02-4H	0.50	2.00	0.50	0.28	0.22
FTA02-2D	0.50	2.00	0.67	0.33	0.34
FTA02-4D	0.50	2.00	0.50	0.28	0.22
FTA02-8D	1.00	2.60	0.50	0.25	0.25
FTA03-2D	1.00	2.60	0.80	0.40	0.40
FTA03-4D	1.00	2.60	0.80	0.40	0.40
FTA02-2C	0.50	2.00	0.50	0.28	0.22
FTA02-4C	0.50	2.00	0.50	0.28	0.22

8.3 Environment Precautions:

This specification product is for general electronic use, ABCO will not be responsible for any damage, cost or loss caused by using this specification product in any special environment. If other applications need to confirm with ABCO.

If consumer intends to use our Company product in special environment or condition (including but not limited to those mentioned below), then will need to make individual recognition of product features and reliability accordingly.

- (a) Used in high temperature and humidity environment
- (b) Exposed to sea breeze or other corrosive gas, such as Cl₂ · H₂S · NH₃ · SO₂ and NO₂.
- (c) Used in non-verified liquids including water, oil, chemical and organic solvents.
- (d) Using non-verified resin or other coating material to seal or coat our Company product.
- (e) After soldering, it is necessary to use water-soluble detergents to clean residual solder fluxes, even though no-clean fluxes are recommended.

8.4 Momentary Overload Precautions:

The product might be out of function when momentary overloaded. Please make sure to avoid momentary overloading while using and preserving.

Remark	<div style="border: 1px solid black; padding: 5px; display: inline-block;"> IT'S NOT UNDER CONTROL FOR PDF FILE PLS NOTE THE VERSION STATED.. </div>	Issue Dep. DATA Center.
	Do not copy without permission	



FTA Series Thick Film Chip Resistors Array Product Specification

Document No.	IE-SP-147
Released Date	2019/10/17
Page No.	13



8.5 Operation and Processing Precautions:

- (a) Avoid damage to the edge of resistor and protective layer caused by mechanical stress.
- (b) Handle with care when printing circuit board (PCB) is divided or fixed on support body, because bending of printing circuit board (PCB) mounting will make mechanical stress for resistors.
- (c) Make sure the power rating is under the limit when using the resistor. When power rating is over the limit, the resistor will be overloaded. There might be machinery damage due to the climbing temperature.
- (d) If the resistor will be exposed under massive impact load (shock wave) in a short period of time, the working environment must be set up well before use.
- (e) Please make evaluation and confirmation when the product is well used in your company and have a through consideration of it's fail-safe design to ensure the system safety.

9 Storage and transportation requirement:

- 9.1 The temperature condition must be controlled as $25\pm 5^{\circ}\text{C}$, and the R.H. must be controlled as $60\pm 15\%$. The stock can maintain quality level in two years.
- 9.2 Please avoid the mentioned harsh environment below when storing to ensure product performance and its' weldability. Places exposed to sea breeze or other corrosive gas, such as Cl_2 、 H_2S 、 NH_3 、 SO_2 and NO_2 .
- 9.3 When the product is moved and stored, please ensure the correct orientation of the box. Do not drop or squeeze the box. Otherwise, the electrode or the body of the product may be damaged.

10 The carton packaged for electronic-information products is made by the symbol as follows: (For china)

	
Marking for control of pollution cause by electronic-information products	Marking for package recovery

Remark	IT'S NOT UNDER CONTROL FOR PDF FILE PLS NOTE THE VERSION STATED..	Issue Dep. DATA Center.
	Do not copy without permission	Series No. 60



FTA Series Thick Film Chip Resistors Array Product Specification

Document No.	IE-SP-147
Released Date	2019/10/17
Page No.	15

Legal disclaimer

ABC CO, its distributors and agents (collectively, "ABC CO"), hereby disclaims any and all liabilities for any errors, inaccuracies or incompleteness contained in any product related information, including but not limited to product specifications, datasheets, pictures and/or graphics. ABC CO may make changes, modifications and/or improvements to product related information at any time and without notice.

ABC CO makes no representation, warranty, and/or guarantee about the fitness of its products for any particular purpose or the continuing production of any of its products. To the maximum extent permitted by law, ABC CO disclaims (i) any and all liability arising out of the application or use of any ABC CO product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for a particular purpose, non-infringement and merchantability.

ABC CO defined this product is for general electrical use , not design for any application for automotive electrical ,life-saving or life support equipment, or any application which may inflict casualties if ABC CO product failure occurred. When consumer is using or selling products of ABC CO without having discussion with the sales representatives and specifically stated the applicability mentioned above in a written form, then the client need to take a full responsibility and agree to protect ABC CO from punishment and damage.

Information provided here is intended to indicate product specifications only. ABC CO reserves all the rights for revising this content without further notification, as long as products are unchanged. Any product change will be announced by ECN.

Remark	<div style="border: 1px solid black; padding: 5px; display: inline-block;"> IT'S NOT UNDER CONTROL FOR PDF FILE PLS NOTE THE VERSION STATED.. </div>	Issue Dep. DATA Center.
	Do not copy without permission	Series No. 60

文件修訂記錄表

文件名稱	RTA Series Half Reverse Concave Type Thick Film Chip Resistors Array Product Specification	編號	IE-SP-147		
版本日期	修訂頁次	修訂內容		修訂者	備註
2018/10/12		1.新制訂 依據 SRD-SP-0124(版本日期：2018.04.09) 轉 IE 規格書 2.刪除±2%產品； 3.刪除低溫操作信賴性實驗		朱華	
2019/10/17	全	依據 SRD-SP-0158(版本日期：2019/06/17) 新增型別 FTA02-2D/4D/8D/2C/4C,FTA03-2D/4D 規格		王荷花	